

The VTG-32E family of sounders have been designed to cover a wide spectrum of applications. The 24 volt EN54-3 approved version is for use with conventional fire alarm systems including SAV-WIRE® two wire and as standard comes with 32 tones. The sounder is supplied with a two-stage alarm override which is activated by a third negative wire from the fire panel.

All tones have been selected to comply with the latest sound patterns and frequencies used throughout the world. All tone options are fully synchronised. The sounder function has been fully approved to EN54 part 3 by the LPCB and VdS on tones 1, 8, 11, 25 and 27.

- fully approved to EN54-3 by LPCB and VdS
- 32 tones plus a selectable override tone
- shallow base IP21C and deep base IP33C versions available
- designed to work with both conventional and two-wire (SAV-WIRE®) systems
- unique twist and lock bayonet mounting system
- removable cover on deep base for surface wiring
- features base locking system as standard



TECHNICAL

voltage range (Vdc)	21.6 - 28	
number of tones	32	
operating frequency (Hz)	440 - 2900	
temperature range (°C)	-20 to +70	
monitoring	reverse polarity	
protection rating	IP21C (shallow)	IP33C (deep)
boxed weight (kg)	0.22 (shallow)	0.25 (deep)
body colours available	red or white (ABS fire retardant plastic)	

PERFORMANCE

volume setting	high	med	low
sound output, typical (dBA)	102.3	97.6	82.1
sound output, anechoic chamber (dBA)	99.9	95.6	80.1
sound output, reverberation chamber (dBA)	117.7	110.7	95.3
max. current consumption @ 24Vdc (mA)	30.8	16.4	8.3
power consumption @ 24Vdc (mW)	739	394	199
NB: see tone list performance for more accurate current consumption figures			

ORDERING INFORMATION

red body, 32 tone, shallow base	VTG-32E-SB-R
red body, 32 tone, deep base	VTG-32E-DB-R
white body, 32 tone, shallow base	VTG-32E-SB-W
white body, 32 tone, deep base	VTG-32E-DB-W

APPROVALS INFORMATION



EN54-3:2001 546a/01






G205137






17
0832-CPR-F2044

DIMENSIONS


all measurements are in mm

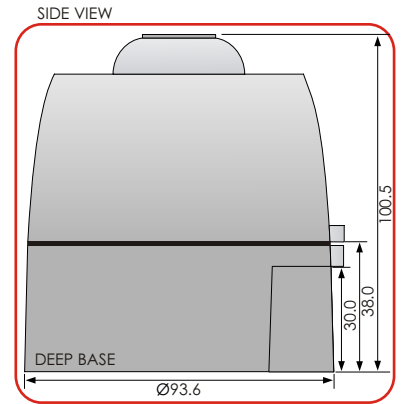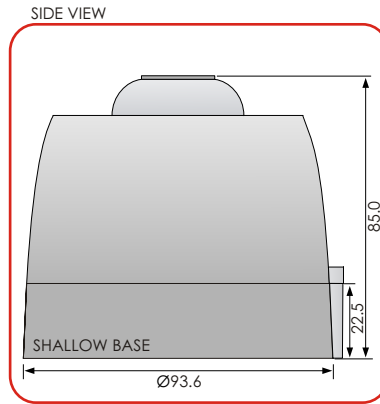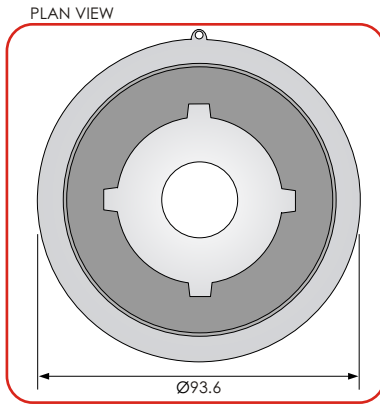


PRODUCT MOUNTING & CABLE ENTRY

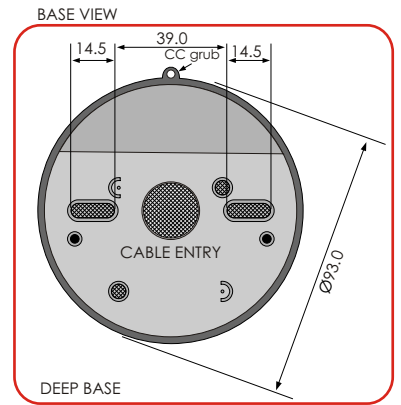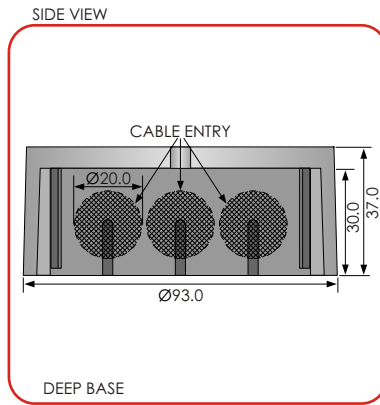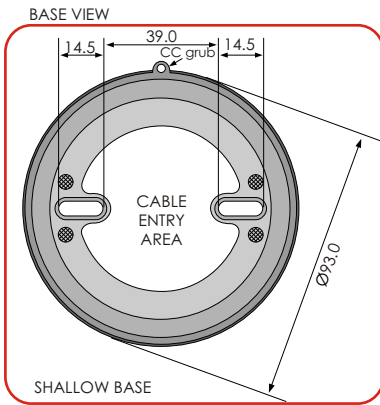

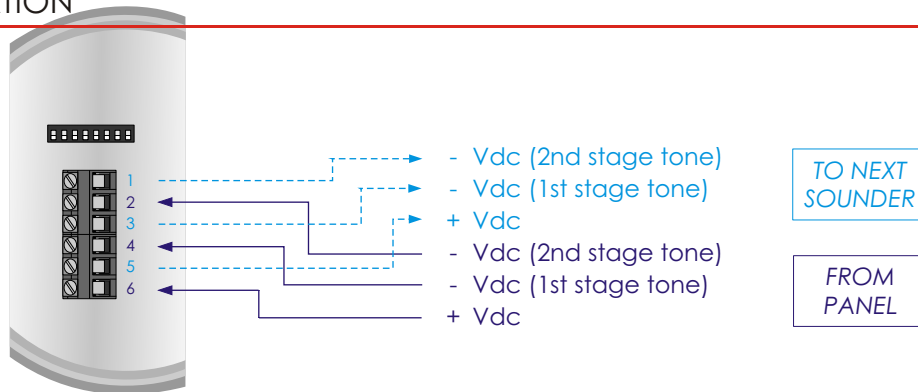






WIRING CONFIGURATION

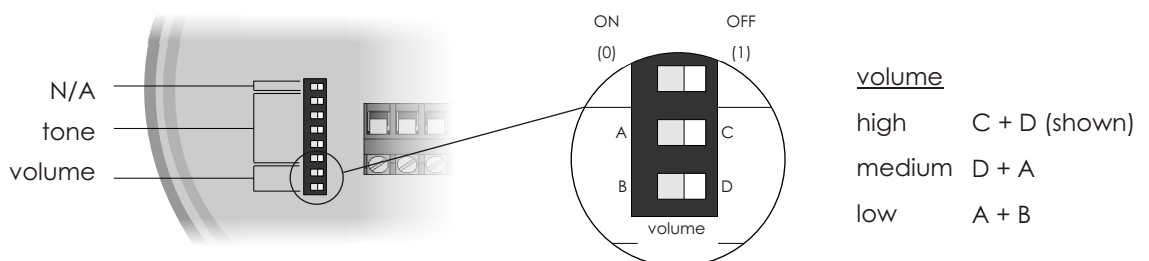

tone & volume SELECTION



TONE LIST - GRAPHICAL

no. name	1st stage frequency	1st stage graphical	2nd stage frequency	2nd stage graphical
1 LF Sweep (Cranford sweep)	800-1000Hz swept every 500ms (2Hz)		800Hz continuous	800Hz 
2 Alternative warble BS	800Hz for 250ms, then 960Hz for 250ms		800Hz continuous	800Hz 
3 Warble Tone BS	800Hz for 500ms, then 1000Hz for 500ms		800Hz continuous	800Hz 
4 Alternative warble BS	500Hz for 250ms, then 600Hz for 250ms		500Hz continuous	500Hz 
5 HF Back up Interrupted	2800Hz for 1000ms, then off for 1000ms		2800Hz continuous	2800Hz 
6 LF Back up Alarm	800Hz for 150ms, then off for 150ms		800Hz continuous	800Hz 
7 HF Back up Interrupted (fast)	2800Hz for 150ms, then off for 150ms		800Hz continuous	800Hz 
8 LF Continuous tone BS5839	800Hz continuous	800Hz 	800Hz continuous	800Hz 
9 Sweep - 1Hz	800-900Hz swept every 1000ms (1Hz)		800Hz continuous	800Hz 
10 Australian slow whoop	970Hz for 625ms, then off for 150ms		500-1200Hz for 3250ms, then off for 250ms	
11 Dutch sweep	970Hz continuous	970Hz 	500-1200Hz for 3500ms, then off for 500ms	
12 Analogue sweep	500-600Hz swept every 500ms (2Hz)		500Hz continuous	500Hz 
13 Sweep - 3Hz	800-970Hz swept every 333ms (3Hz)		800Hz continuous	800Hz 
14 Alternate HF slow sweep	2350-2900Hz swept every 333ms (3Hz)		2400Hz continuous	2400Hz 
15 Fast HF sweep	2400-2800Hz swept every 143ms (7Hz)		2400Hz continuous	2400Hz 
16 US Temporal Pattern LF	950Hz for 500ms on, 500ms off (x3), then 1500ms off		800Hz continuous	800Hz 
17 Interrupted BS	800Hz for 500ms, then off for 500ms		800Hz continuous	800Hz 
18 ISO 8201 LF BS5839 Pt 1	970Hz for 500ms, then off for 500ms		970Hz for 500ms, then off for 500ms	
19 Interrupted medium	1000Hz for 250ms, then off for 250ms		800Hz continuous	800Hz 
20 ISO8201 HF	2850Hz for 500ms, then off for 500ms		2850Hz for 500ms, then off for 500ms	
21 Continuous	1000Hz continuous	1000Hz 	1000Hz continuous	1000Hz 
22 LF Buzz	800-950Hz swept every 9ms (110Hz)		800Hz continuous	800Hz 
23 HF Continuous	2800Hz continuous	2800Hz 	2800Hz continuous	2800Hz 
24 Sweep	800-970Hz swept every 111ms (9Hz)		800Hz continuous	800Hz 
25 German DIN tone	1200-500Hz swept every 1000ms (1Hz)		800Hz continuous	800Hz 
26 Swedish Fire signal	660Hz for 150ms, then off for 150ms		660Hz for 150ms, then off for 150ms	
27 French tone AFNOR	554Hz for 100ms, then 440Hz for 400ms		800Hz continuous	800Hz 
28 Swedish all clear signal	660Hz continuous	660Hz 	660Hz continuous	660Hz 
29 US Temporal Pattern HF	2900Hz for 500ms on, 500ms off (x3), then 1500ms off		2900Hz continuous	2900Hz 
30 Siren 2 way ramp (short)	500-1200Hz rising for 250ms, then falling for 250ms		800Hz continuous	800Hz 
31 FP1063.1-Telecom	800Hz for 250ms, then 970Hz for 250ms		800Hz continuous	800Hz 
32 Siren 2 way ramp (long)	500-1200Hz rising for 3000ms, then falling for 3000ms		800Hz continuous	800Hz 

TONE LIST - PERFORMANCE

no.	name	1st stage tone	switch (23456)	typical current (mA)			typical sound output (dBA)		
				low	medium	high	low	medium	high
1	LF Sweep (Cranford sweep)	800-1000Hz swept every 500ms (2Hz)	11111	7.3	12.4	17.3	80.1	95.6	99.9
2	Alternative warble BS	800Hz for 250ms, then 960Hz for 250ms	11110	7.2	12.7	17.2	80.4	95.7	100.0
3	Warble Tone BS	800Hz for 500ms, then 1000Hz for 500ms	11101	7.2	12.3	17.2	79.7	94.7	98.5
4	Alternative warble BS	500Hz for 250ms, then 600Hz for 250ms	11100	6.3	10.2	12.9	80.0	95.8	99.1
5	HF Back up Interrupted	2800Hz for 1000ms, then off for 1000ms	11011	8.7	17.1	27.5	79.2	93.7	101.0
6	LF Back up Alarm	800Hz for 150ms, then off for 150ms	11010	6.3	11.6	15.9	78.6	93.6	97.2
7	HF Back up Interrupted (fast)	2800Hz for 150ms, then off for 150ms	11001	6.4	17.0	27.3	78.3	92.9	99.9
8	LF Continuous tone BS5839	800Hz continuous	11000	8.6	11.5	15.8	79.8	94.7	98.4
9	Sweep - 1Hz	800-900Hz swept every 1000ms (1Hz)	10111	6.8	11.9	16.7	80.2	95.6	99.8
10	Australian slow whoop	970Hz for 625ms, then off for 150m	10110	7.2	13.1	17.5	80.2	95.5	99.9
11	Dutch sweep	970Hz continuous	10101	7.0	13.1	17.8	80.2	95.5	100.1
12	Analogue sweep	500-600Hz swept every 500ms (2Hz)	10100	7.3	10.1	12.6	80.2	94.8	97.8
13	Sweep - 3Hz	800-970Hz swept every 333ms (3Hz)	10011	6.3	12.2	17.2	80.2	95.7	100
14	Alternate HF slow sweep	2350-2900Hz swept every 333ms (3Hz)	10010	7.2	16.3	30.8	83.7	95.7	104.6
15	Fast HF sweep	2400-2800Hz swept every 143ms (7Hz)	10001	8.5	15.9	29.9	82.6	97.1	104.2
16	US Temporal Pattern LF	950Hz for 500ms on, 500ms off (x3), then 1500ms off	10000	8.5	12.0	17.2	80.6	96.0	100.5
17	Interrupted BS	800Hz for 500ms, then off for 500ms	01111	6.2	11.6	16.1	79.6	94.5	98.3
18	ISO 8201 LF BS5839 Pt 1	970Hz for 500ms, then off for 500ms	01110	6.4	13.0	17.7	80.1	95.4	99.9
19	Interrupted medium	1000Hz for 250ms, then off for 250ms	01101	6.4	12.6	17.9	78.5	93.8	98.0
20	ISO8201 HF	2850Hz for 500ms, then off for 500ms	01100	6.2	18.0	27.0	79.4	93.4	100.7
21	Continuous	1000Hz continuous	01011	8.5	12.7	18.0	78.9	94.2	98.7
22	LF Buzz	800-950Hz swept every 9ms (110Hz)	01010	7.4	12.0	16.8	79.9	95.3	99.5
23	HF Continuous	2800Hz continuous	01001	7.1	17.1	27.5	79.3	93.8	101.1
24	Sweep	800-970Hz swept every 111ms (9Hz)	01000	8.5	12.0	16.7	80.1	95.5	99.7
25	German DIN tone	1200-500Hz swept every 1000ms (1Hz)	00111	7.0	13.7	19.3	79.5	95.0	99.0
26	Swedish Fire signal	660Hz for 150ms, then off for 150ms	00110	6.2	10.5	14.2	76.0	91.9	95.6
27	French tone AFNOR	554Hz for 100ms, then 440Hz for 400ms	00101	6.2	9.3	11.6	76.9	93.1	95.9
28	Swedish all clear signal	660Hz continuous	00100	6.4	10.4	14.0	77.1	93.1	96.8
29	US Temporal Pattern HF	2900Hz for 500ms on, 500ms off (x3), then 1500ms off	00011	8.6	18.5	27.1	79.2	93.1	100.4
30	Siren 2 way ramp (short)	500-1200Hz rising for 250ms, then falling for 250ms	00010	6.8	11.2	19.0	79.2	94.6	98.7
31	FP1063.1-Telecom	800Hz for 250ms, then 970Hz for 250ms	00001	7.1	12.6	16.8	80.2	95.5	100.0
32	Siren 2 way ramp (long)	500-1200Hz rising for 3000ms, then falling for 3000ms	00000	7.2	12.7	18.1	81.0	95.9	100.2

EN54-3 APPROVED MINIMUM SOUND OUTPUT AT 1 METER

Tone 1 - Cranford Sweep					
Horizontal Plane			Vertical Plane		
Angle	21.6V	28V	Angle	21.6V	28V
15°	92.6	94.6	15°	93.3	95.2
45°	95.7	97.8	45°	96.0	98.0
75°	97.7	99.5	75°	97.8	99.8
105°	97.8	99.6	105°	97.7	99.7
135°	96.0	98.0	135°	96.0	97.9
165°	91.3	93.2	165°	90.6	92.4

Continuous 800Hz Tone (Over ride Tone)					
Horizontal Plane			Vertical Plane		
Angle	21.6V	28V	Angle	21.6V	28V
15°	90.3	92.3	15°	90.3	92.3
45°	93.5	95.4	45°	93.3	95.3
75°	96.1	98.0	75°	95.8	97.8
105°	95.9	97.9	105°	95.7	97.6
135°	93.9	95.8	135°	93.4	95.3
165°	89.6	91.5	165°	87.4	89.6


Tone 25 - German DIN Tone					
Horizontal Plane			Vertical Plane		
Angle	21.6V	28V	Angle	21.6V	28V
15°	91.6	93.5	15°	90.8	92.8
45°	95.7	97.7	45°	95.2	97.0
75°	96.9	98.9	75°	97.1	99.1
105°	97.0	98.9	105°	97.0	98.9
135°	95.5	97.4	135°	95.0	97.0
165°	90.3	92.3	165°	90.0	91.9

Tone 27 - French AFNOR Tone					
Horizontal Plane			Vertical Plane		
Angle	21.6V	28V	Angle	21.6V	28V
15°	87.8	89.7	15°	88.0	89.8
45°	92.2	94.1	45°	92.6	94.5
75°	93.7	95.7	75°	94.1	96.3
105°	94.0	95.7	105°	93.9	95.8
135°	92.5	94.4	135°	92.2	94.0
165°	85.6	87.5	165°	86.1	88.1


Tone 11 - Dutch Sweep Tone					
Horizontal Plane			Vertical Plane		
Angle	21.6V	28V	Angle	21.6V	28V
15°	92.7	94.6	15°	92.2	94.1
45°	96.0	98.0	45°	96.4	98.4
75°	97.8	99.7	75°	97.8	99.8
105°	97.8	99.6	105°	97.5	99.5
135°	96.0	98.0	135°	96.3	98.1
165°	90.5	92.4	165°	91.3	93.2

EN54-3 APPROVED POLAR DIAGRAMS


Tone 1 - Cranford Sweep

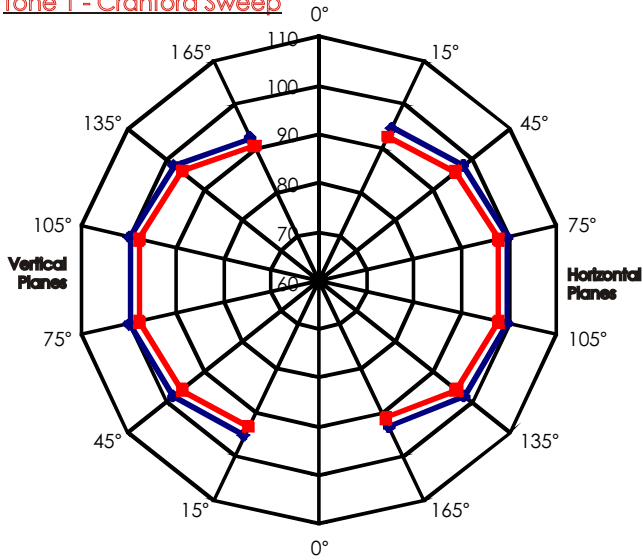


Continuous 800Hz Tone (Override Tone)

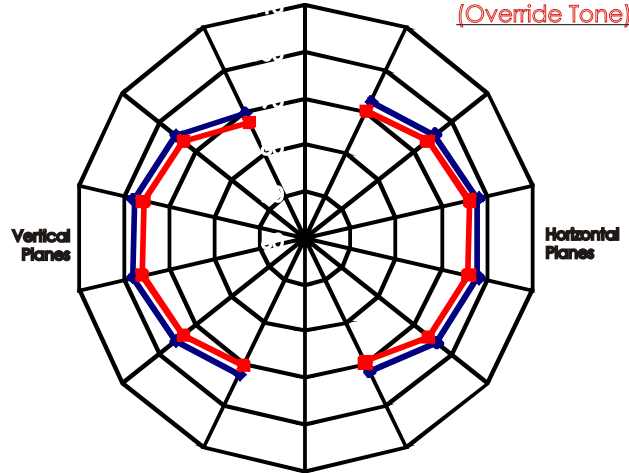

Tone 25 - German DIN Tone

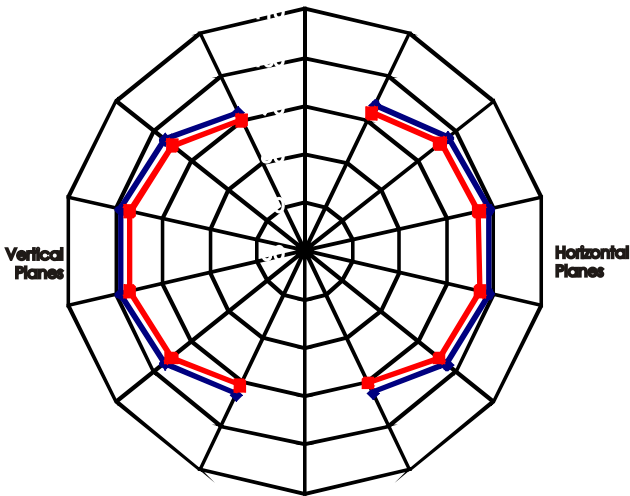

Tone 27 - French AFNOR Tone

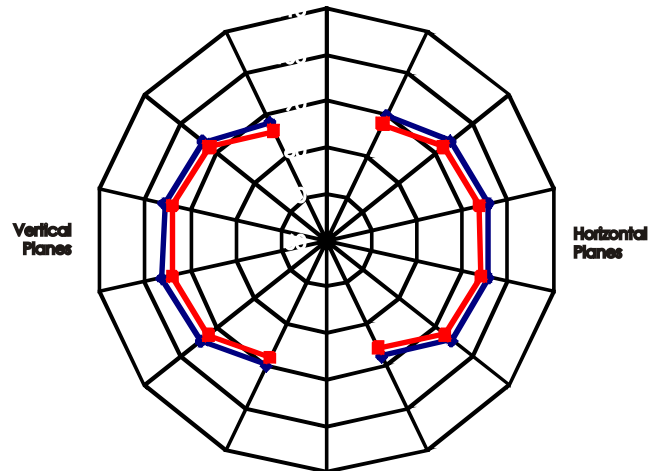

Tone 11 - Dutch Sweep Tone

