

## SC-2202 22" VIDEO SURVEILLANCE MONITOR WITH BNC





- 1920 x 1080 resolution and wide viewing angle
- HDMI, VGA, Composite (BNC) and dual 2W speakers
- Anti-Burn-in<sup>™</sup> technology prevents image ghosting
- Image Enhancer: 3D Comb Filter / Deinterlace / Noise Reduction
- BNC passive loop-through output port
- Black-level adjustment for presenting more details in dark images
- Selectable gamma curves optimise the overall image quality
- CCTV picture mode for maximum image detail and clarity in low light footage
- Designed for continuous 24/7 operation
- · Flicker-free display technology reduces eye discomfort












The SC-2202 is a 22-inch security monitor specifically designed for surveillance operators - especially those with a 24/7 operating for efficient video monitoring. The SC-2202 provides value-added video enhancement controls that help create detailed images for low-light footage. Its optional monitor mounting solutions support single or multiple monitor setups. In terms of cost-to-performance, this model is the solution for productivity in modern operator workstations.

## **TECHNICAL DRAWING**

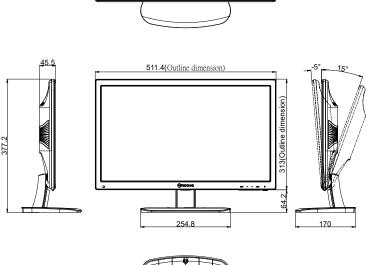







## **SPECIFICATIONS**

| Panel |  |
|-------|--|
|       |  |

| Panel                              |  |
|------------------------------------|--|
| Panel Type                         | LED-Backlit TFT LCD  |
| Panel Size                         | 21.5"  |
| Max. Resolution                    | FHD 1920 x 1080  |
| Pixel Pitch                        | 0.248 mm   |
| Brightness                         | 250 cd/m <sup>2</sup>  |
| Contrast Ratio                     | 20,000,000:1 (DCR)   |
| Viewing Angle (H/V)                | 170°/160°  |
| Display Colour                     | 16.7M  |
| Response Time                      | 3 ms   |
| Frequency                          |  |
| Frequency (H)                      | 30 kHz-85 kHz  |
| Frequency (V)                      | 48 Hz-75 Hz  |
| Signal Input                       | 40 Hz-70 Hz  |
| HDMI                               | 1.4 x 1  |
| VGA                                | 15-Pin D-Sub x 1   |
| Composite                          | BNC x1   |
|                                    | BINC X I   |
| Signal Output                      | BNC x1   |
| Composite                          | DING X I   |
| Audio                              | Charles A. P. Lad (O.F. and)   |
| Audio In                           | Stereo Audio Jack (3.5 mm)   |
| Internal Speakers                  | 2W x 2   |
| Power                              |  |
| Power Supply                       | Internal   |
| Power Requirements                 | AC 100-240V, 50/60 Hz  |
| On Mode                            | 16W (On)   |
| Standby Mode                       | < 0.5W   |
| Off Mode                           | < 0.3W   |
| Operating Conditions               |  |
| Temperature                        | 5°C-35°C (41°F-95°F)   |
| Humidity                           | 20%-85% (non-condensing)   |
| Storage Conditions                 |  |
| Temperature                        | -20°C-60°C (-4°F-140°F)  |
| Humidity                           | 10%-90% (non-condensing)   |
| Mounting                           |  |
| VESA FPMPMI                        | Yes (100 x 100 mm)   |
| Stand                              |  |
| Tilt                               | -5° to 15°   |
| Security                           |  |
| Kensington Security Slot           | Yes  |
| Dimensions                         |  |
| Product with Base (W x H x D)      | 511.4 x 377.2 x 170.0 mm (20.1" x 14.9" x 6.7")                                    |
| Product w/o Base (W x H x D)       | 511.4 x 313.0 x 45.5 mm (20.1" x 12.3" x 1.8")                                     |
| Packaging (W x H x D)              | 561.0 x 426.0 x 103.0 mm (22.1" x 16.8" x 4.1")                                    |
| Weight                             | 00110 X 72010 X 10010 HIHI (221 X 1010 X 7.1 )                                     |
| Product w/o Base                   | 20 kg (6.4 lb)   |
| Product w/o Base Product with Base | 2.9 kg (6.4 lb)  |
|                                    | 3.2 kg (7.1 lb)  |
| Packaging  Packaging               | 4.6 kg (10.1 lb)   |
| Regulation Approval                | CELVE WEEE DALIC DEACH EAC   |
| Certifications & Compliance        | CE, LVD, WEEE, RoHS, REACH, EAC  |
| Accessories                        |  |
| Supplied                           | Power Cord, VGA Cable, Audio Cable, Quick Start Guide, Warranty Card               |
| Optional Accessories               |  |
| •                                  |  |
| Ceiling Mount                      | CMP-01+WMK-03  |
| •                                  | CMP-01+WMK-03<br>WMA-01, WMK-01, WMK-03, PMK-01<br>DMC-01, DMC-02D, DMS-01D, ES-02 |













