

tel.: +48 (58) 340 24 40 fax: +48 (58) 340 24 49 e-mail: info@alarmtech.pl

Alarmtech Polska Sp. z o.o. ul. Kielnienska 115 80-299 Gdansk-Osowa, Poland


MC 240-S48

MC 240-S48 SET: MAGNETIC REED & CONTACT IN ALUMINUM HOUSING

The MC 240-S45 is a special set for heavy-duty applications, designed to mount on door, gates etc. It includes a magnetic reed MC 240-C enclosed in an MC 200-4 AI housing and an extra strong magnet in an MC 200-8 housing to allow contact actuation with wider gaps. The MC 240-S48 set can be used with an MC 200-T armoured sleeving accessory.

TECHNICAL DATA

- Reed relay switch configuration: NC
 Contact rating: max. 200 V DC/peak AC/500 mA/10 VA
- Anti-tamper loop
- 4 wire, 6 m white lead, VdS approved
- Magnet material: Alnico 5
- Approved by Techom, VdS, ANPI/NVBB and other European certification bureaus.

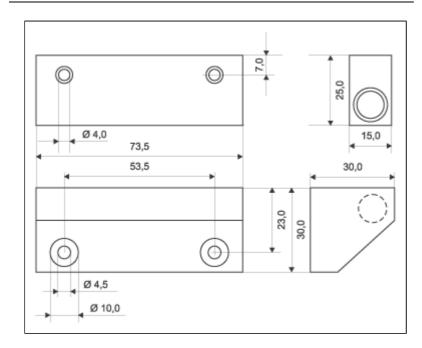





PRODUCT CODE	PRODUCT DESRIPTION	GAP DISTANCE - WOOD	GAP DISTANCE - STEEL	PACKAGING
MC 240-S48	MC 240-C magnetic reed housed in the MC 200-4 + magnet housed in the MC 200-8 + white, 6 m, 4 wire lead	41 mm	19 mm	1 set